

## Sanitary RTD Sensor: Series RDP M12 Quick-Connect Plug

REOTEMP's Sanitary RTD sensors are specifically designed for direct insertion into sanitary process applications when a standard thermowell is not specified or the process environment is not exposed to pressure. Sanitary RTD's are ideal for food, beverage, and pharmaceutical industries.



### FEATURES / BENEFITS

- 3A Approved Wetted Surfaces (32 Ra max.)
- 3A certificate provided
- Sanitary tri-clamp design
- 316SS wetted materials
- Fully sealed for washdown (IP67)
- M12 plug for easy hookup
- Calendar-Van Dusen coefficients available for optimized sensor accuracy (Hi accuracy curve plot option)

### SPECIFICATIONS

RTD: 100 ohm Pt., 0.00385  $\Omega/0^{\circ}\text{C}$ , 3-wire or 4-wire

**ACCURACY:** Class A, C =  $\pm (0.15 + 0.0028^*(t))$  [-100/400 $^{\circ}\text{C}$  only]  
1/10 Din B, C =  $\pm 1/10(0.3 + 0.005^*(t))$  [ 0-100 $^{\circ}\text{C}$  only]

**TEMPERATURE RANGE:** -328 $^{\circ}\text{F}$ /600 $^{\circ}\text{F}$

**PROCESS CONNECTION:** Tri-clamp (std); various sizes.

**STEM LENGTH:** 2" to 36" std lengths; custom lengths available.

**STEM DIAMETER:** Straight stems 1/4", 3/8", 3/16", 1/8"

Reduced stems 3/8" reduced to 3/16" tip

1/2" reduced to 1/4" tip

**WETTED FINISH:** Ra20 - Ra32 max., Ra20 max. (optional)

**M-12 4-PIN QUICK CONNECT:** see next page for pin scheme

**OPTIONAL MATING CONNECTOR:** Female connector with or without wire available



Made in U.S.A.

**Standard Lead Time 5-7 Days**


# Sanitary RTD Sensor: Series RDP M12 Quick-Connect Plug

### HOW TO ORDER

RDP	T15	A	020	A	S3	W	120	P	S	
<b>Process Connection:</b>  T15 = 1.5" Tri-Clamp (std) T20 = 2" Tri-Clamp T25 = 2.5" Tri-Clamp T30 = 3" Tri-Clamp T40 = 4" Tri-Clamp T75 = 3/4" Tri-Clamp	<b>Stem Style:</b>  <u>Straight Stems</u> A = 1/4" dia. (std) F = 3/8" dia. D = 3/16" dia. H = 1/8" dia.  <u>Reduced Tip Stems</u> B = 3/8" dia. reduced to 3/16" tip C = 1/2" dia. reduced to 1/4" tip E = Special HTST Fast-Response 3/8" dia. reduced to 3/16" tip	<b>Stem Length:</b>  020 = 2" Stem 030 = 3" Stem 040 = 4" Stem 060 = 6" Stem 090 = 9" Stem 120 = 12" Stem 180 = 18" Stem 240 = 24" Stem 360 = 36" Stem  *Other stems available up to 72".	<b>RTD Tolerance</b> 100 ohm 385 Curve:  A = Class A (std) T = 1/10 B	<b>Element:</b>  Single (one element) S3 = Single 3-Wire S4 = Single 4-Wire	<b>Mating Connector for M12 Plug:</b>  N = None W = Mating Female Connector w/ Wire F = Mating Female Connector Only (user installs wire)	<b>Wire Length</b> (if "W" is selected):  Wire Length *Specify length in inches	<b>Wire Type</b> (if "W" is selected):  P = PVC Insulated	<b>Wire Termination</b> (if "W" is selected):  S = Stripped (std) L = Spade Lugs T = Terminal Pins M = Copper Crimps	<b>Options:</b>  - = None TS = Stainless Steel Tag RA = Ra 20 Max Wetted Finish w/ Cert AC = Hi Accuracy Curve Plot  <u>Cal Certs</u> R3 = Cal Cert, 3 pt (0°F, 100°F, 190°F) L3 = Cal Cert, 3 pt (32°F, 100°F, 150°F) R1 = Cal Cert, 1 pt (150°F) L1 = Cal Cert, 1 pt (100°F) C3 = Cal Cert, 3 pt (customer picks pts) C1 = Cal Cert, 1 pt (customer picks pt)	

Tri-Clamp Size	"D" Diameter	
	in	(mm)
3/4"	0.98	(25.0)
*1.5"	1.98	(50.4)
2"	2.52	(63.9)
2.5"	3.05	(77.4)
3"	3.58	(90.9)
4"	4.68	(118.9)

\*1.5" tri-clamp fits 1.5" and 1" tri-clamp fittings

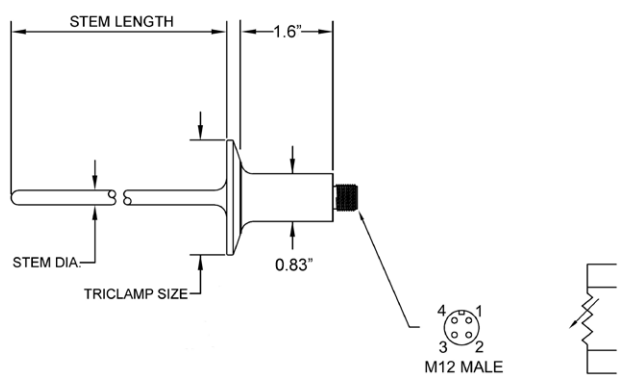

NOTE: FOR 3-WIRE HOOKUP, USE ANY THREE PINS